

# DOUBLE DISK S



Double disc system made in polyethylene fertilizer spreader.

## Standard equipment

- 2" 1/2, iron tube chassis.
- Galvanized chassis.
- Double-plate distributing system completely made of stainless steel
- Maximum work range of 24 meters.
- Standard hydraulic opening system.
- Elements of contact with the product made of stainless steel.
- Hopper made of high-density polyethylene.
- Shaking system.
- Cardan joint.
- Accident prevention protections according to EC directives.

## MODELS


mod.	It	kg*	kg**	KG	A	B	C
it	kg*	kg**	kg	mm	mm	mm	
ADD900	900	1350	963	295	1115	1740	1910
ADD1200	1200	1800	1284	315	1315	1740	1910
ADD1500	1500	2250	1605	325	1465	1740	1910

\* Con abono con densidad 1.50 /


\* With fertilizer with density 1.50

\*\* Con abono con densidad 1.07 /

\*\* With fertilizer with density 1.07

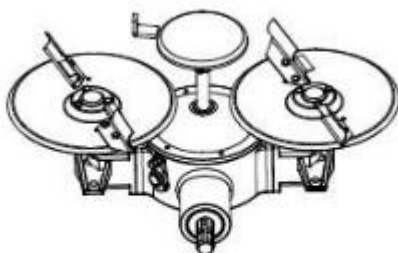

Mechanical unit monoblock with double plate.

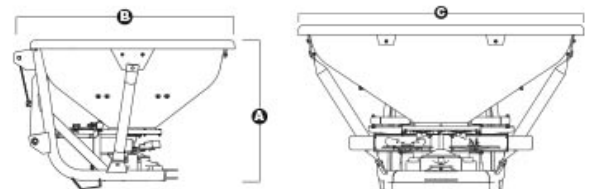

Distribution system of the fertilizer by double plate.